

DESCRIPTION

The MS3713 is a slim, plug-in square-root extractor that extracts the square roots of DC current or voltage signals, converts them into commonly used DC signals and provides isolated single or dual output.

ORDERING CODE

MS3713 - -

Model _____

Power Supply _____
A: 100 to 240V AC (50 to 60Hz)
D: 24V DC **P:** 100 to 240V DC

Input _____
A: 4 to 20mA DC **3:** 0 to 1V DC
B: 2 to 10mA DC **4:** 0 to 10V DC
C: 1 to 5mA DC **5:** 0 to 5V DC
D: 0 to 20mA DC **6:** 1 to 5V DC
E: 4 to 20mA DC *1 **0:** Other DC voltage signals
H: 10 to 50mA DC
Z: Other DC current signals


*1: Shunt resistor 50Ω

Output 1 _____
A: 4 to 20mA DC **1:** 0 to 10mV DC
D: 0 to 20mA DC **2:** 0 to 100mV DC
Z: Other DC current signal **3:** 0 to 1V DC
 4: 0 to 10V DC
 5: 0 to 5V DC
 6: 1 to 5V DC
 3W: ±1V DC
 4W: ±10V DC
 5W: ±5V DC
 0: Other DC voltage signals

Output 2 _____
No code: None
The codes are the same as for Output 1.

Note 1: When a voltage output is selected for Output 1, a current output cannot be selected for Output 2.
Note 2: When the code A (4 to 20mA) is selected for both of the two outputs, the output load will be 550Ω maximum for Output 1 and 350Ω maximum for Output 2.

Options _____
No code: None
/L: Dual current output with high output load (OUT-1: 750Ω / OUT-2: 550Ω)
/H: Polyurethane conformal coating
/X: Others (Special order)
* For non-standard options, ask MTT for availability.


ORDERING INFORMATION

To place an order, please use the ordering code format as shown on the left.
(e.g.) MS3713-A-A66

Other Ordering Examples:

For an input code of "Z": MS3713-A-ZAA (Input: 8 to 20mA)

For an output code of "0": MS3713-A-A60 (Output: 2 to 5V)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /LX).

SPECIFICATIONS
POWER SECTION

Power Requirements	100 to 240V AC: 85 to 264V AC (47 to 63Hz)		
	24V DC: 24V DC±10%		
	100 to 240V DC: 85 to 264V DC		
Power Sensitivity	Better than ±0.1% of span for each power supply range.		
Power Line Fuse	160mA fuse is installed (standard).		
Power Consumption			
Power	100-240V AC	24V DC	100-240V DC
Single Output	5.5VA max	1.6W max	6.0W max
Dual Output	6.0VA max	2.0W max	7.2W max

INPUT SECTION

Input Resistance	
Voltage Input (DC)	With or without power: 1MΩ min.
Current Input (DC)	4 to 20mA (std.) 250Ω
	2 to 10mA 250Ω
	1 to 5 mA 100Ω
	0 to 20mA 250Ω
	10 to 50mA 10Ω
Allowable Input Voltage	
Voltage Input Model	30V DC max., continuous. (Standard for a span up to 10V)
Current Input Model	40mA DC max., continuous. (Standard for 4 to 20mA)

Ranges Available		
	Current Signal	Voltage Signal
Input Range (DC)	0 to 100mA	0 to 300V
Input Span (DC)	100µA to 100mA	200mV to 300V
Input Bias	0 to 100%	0 to 100%
Input Spec. Ex.1: For 4 to 20mA input, the input span is 16mA and the bias +25%.		
Input Spec. Ex. 2: For 2 to 6V input, the input span is 4V and the bias +50%.		

● OUTPUT SECTION

Allowable Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10kΩ min.
Current Output (DC)	100mV	100kΩ min.
	4-20mA single output	750Ω max.
4-20mA dual output		Output 1:
		550Ω max.
		Output 2:
		350Ω max.

Zero Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
-----------------	--

Span Adjustment	Approx. ±5% of span. (Adjustable by the front-accessible trimmer.)
-----------------	--

Square-Root Extraction	$X = 10 \times \sqrt{Y}$ where X = Output signal (0 to 100%) Y = Input signal (0 to 100%) Note: The cutoff function works when the output reaches 8%±1%.
------------------------	--

Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%
Note: For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.		
Output Spec. Ex.1: For 4 to 20mA output, the output span is 16mA and the bias +25%.		
Output Spec. Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.		

● PERFORMANCE

Accuracy Rating	Better than ±0.2% of span (with input of 1 to 100%, at 25°C±5°C).
Temperature Characteristics	Better than ±0.2% of span per 10°C change in ambient.
Response Time	120ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	4-way isolation between input, output 1, output 2, and power.
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output 1, output 2, power, and ground.
Dielectric Strength	Input / [Output 1, Output 2] / [Power, Ground]: 2000V AC for 1 minute (Cutoff current: 0.5mA) Power / Ground: 2000V AC for 1 minute (Cutoff current: 5mA) Output 1 / Output 2: 500V AC for 1 minute (Cutoff current: 0.5mA)

Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C


● PHYSICAL

Installation	Wall/DIN rail mounting
Wiring	M3.5 screw terminal connection (with a power terminal block cover & drop-proof screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W29 × H86 × D125 mm (including the mounting screw and socket)
Weight	Main unit: 120g max. Socket: 80g max.

● MATERIAL

Housing	ABS resin (UL 94V-0)
Terminal Block	PBT resin (UL 94V-0)
Terminal Block Cover	PC resin (UL 94V-2)
DIN Rail Stopper	PP resin (UL 94HB)
Screw Terminal	Nickel-plated steel
Contacts Material and Finish	Brass with 0.2µm gold plating
Printed Circuit Board	Glass fabric, epoxy resin (FR-4: UL 94V-0)

TERMINAL ASSIGNMENTS

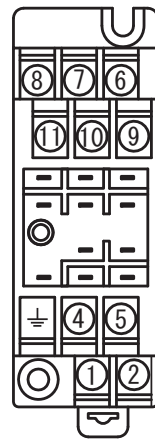

①	P (+)	POWER
②	N (-)	
⊥	GND	
④	+ OUTPUT 1	
⑤	- OUTPUT 1	
⑥	N.C.	
⑦	+ OUTPUT 2	
⑧	- OUTPUT 2	
⑨	+ INPUT	
⑩	- INPUT	
⑪	N.C.	

BLOCK DIAGRAM

