

DESCRIPTION

The MS3004 is a terminal block type high-level signal conditioner (isolator) that converts DC current or voltage signals into commonly used DC signals and provides an isolated single output.

ORDERING CODE

MS3004 - -

Model _____

Power Supply _____

D: 24V DC **Q:** 12V DC

* The 12V DC version is not subject to CE approval.

Input _____

A: 4 to 20mA DC	3: 0 to 1V DC
B: 2 to 10mA DC	4: 0 to 10V DC
C: 1 to 5mA DC	5: 0 to 5V DC
D: 0 to 20mA DC	6: 1 to 5V DC
E: 4 to 20mA DC *1	4W: ±10V DC
H: 10 to 50mA DC	5W: ±5V DC
Z: Other DC current signals	0: Other DC voltage signals

*1: Shunt resistor 50Ω

Output _____

A: 4 to 20mA DC	1: 0 to 10mV DC
D: 0 to 20mA DC	2: 0 to 100mV DC
Z: Other DC current signals	3: 0 to 1V DC
	4: 0 to 10V DC
	5: 0 to 5V DC
	6: 1 to 5V DC
	1W: ±10mV DC
	2W: ±100mV DC
	3W: ±1V DC
	4W: ±10V DC
	5W: ±5V DC
	0: Other DC voltage signals

Options _____


No code: None

/K: Fast response (0 to 90% response time: 10ms max.)

/H: Polyurethane conformal coating

/X: Others (Special order)

* For non-standard options, ask MTT for availability.

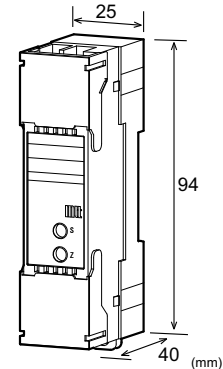
SPECIFICATIONS
POWER SECTION

Power Requirements	24V DC: 24V DC±10%
	12V DC: 12V DC±20%
Power Sensitivity	Better than ±0.1% of span for each power supply range.
Power Line Fuse	250mA fuse is installed (standard).
Power Consumption	
Power	24V DC 12V DC
Current Output	40mA max. 70mA max.
Voltage Output	16mA max. 25mA max.
Note: The above figures are in the condition of the rated voltage supplied.	

INPUT SECTION

Input Resistance	
Voltage Input (DC)	1MΩ min. with or without power.
Current Input (DC)	4 to 20mA (std.) 250Ω
	2 to 10mA 250Ω
	1 to 5 mA 100Ω
	0 to 20mA 250Ω
	10 to 50mA 10Ω
Allowable Input Voltage	
Voltage Input Model	30V DC max., continuous. (Standard for a span up to 10V)
Current Input Model	40mA DC max., continuous. (Standard for 4 to 20mA)

Ranges Available

	Current Signal	Voltage Signal
Input Range (DC)	-100 to 100mA	-300 to 300V
Input Span (DC)	100µA*1 to 200mA	200mV*2 to 600V
Input Bias	-100 to 100%	-100 to 100%

Note: For any input range including negative input signals, the input spans for current and voltage signals range from (*1)200µA to 200mA and (*2)400mV to 600V, respectively.

Input Spec. Ex. 1: For 3 to 8V input, the input span is 5V and the bias +60%.

Input Spec. Ex. 2: For -5 to 0V input, the input span is 5V and the bias -100%.

ORDERING INFORMATION

To place an order, please use the ordering code format as shown above.
(e.g.) MS3004-D-A6

Other Ordering Examples:

For an input code of "Z": MS3004-D-ZA (Input: 8 to 20mA)

For an output code of "0": MS3004-D-A0 (Output: 2 to 5V)

For an option code of "X": MS3004-D-66/X (0-90% response time: 5ms max.)

Note: If you wish to include multiple options in your order, specify the option codes in series (e.g. /KX).

● **OUTPUT SECTION**

Allowable Output Load		
Voltage Output (DC)	1V span and up	2mA max.
	10mV	10kΩ min.
	100mV	100kΩ min.
Current Output (DC)		550Ω max.
Zero Adjustment	Approx. ±2.5% of span. (Adjustable by the front-accessible trimmer.)	
Span Adjustment	Approx. ±2.5% of span. (Adjustable by the front-accessible trimmer.)	
Ranges Available		
	Current Signal	Voltage Signal
Output Range (DC)	0 to 20mA	-10 to 10V
Output Span (DC)	4 to 20mA	10mV to 20V
Output Bias	0 to 100%	-100 to 100%
* For current output signals, the accuracy of any current output smaller than 0.1mA is not guaranteed.		
Output Spec Ex. 1: For 4 to 20mA output, the output span is 16mA and the bias +25%.		
Output Spec Ex. 2: For -1 to 4V output, the output span is 5V and the bias -20%.		

● **PERFORMANCE**

Accuracy Rating	Better than ±0.1% of span (at 25°C±5°C).
Temperature Effect	Better than ±0.2% of span per 10°C change in ambient.
Response Time	85ms max. (0 to 90%) with a step input at 100%.
CMRR	100dB min. (500V AC, 50/60Hz)
Isolation	3-way isolation between input, output, and power.
Insulation Resistance	100MΩ min. (@ 500V DC) between input, output, and power.
Dielectric Strength	Input / Output / Power: 1500V AC for 1 minute (Cutoff current: 0.5mA)
Surge Withstand Capability	Tested as per ANSI/IEEE C37.90.1-1989.
Operating Environment	Ambient temperature: -5 to 55°C Humidity: 5 to 90% RH (non-condensing)
Storage Temperature	-10 to 60°C

● **PHYSICAL**

Installation	DIN rail mounting
Wiring	M3.5 screw terminal connection (with drop-proof screws)
Screwing Torque	0.8 to 1.0 [Nm] * Recommended
External Dimensions	W25.0 × H94.0 × D40.0 mm
Weight	90g max.


● **MATERIAL**

Housing	ABS resin (UL 94V-0)
Screw Terminal	Nickel-plated steel
Printed Circuit Board	Glass fabric, epoxy resin (FR-4: UL 94V-0)

● **STANDARDS CONFORMITY**

EC Directive Conformity	EMC Directive (2014/30/EU) EN61326-1:2013 Low Voltage Directive (2014/35/EU) IEC61010-1 EN61010-1:2010/A1:2019 Installation Category II Pollution Degree 2
--------------------------------	--

TERMINAL ASSIGNMENTS



①	N.C.
②	N.C.
③	INPUT +
④	INPUT -
⑤	OUTPUT +
⑥	OUTPUT -
⑦	+ POWER
⑧	

BLOCK DIAGRAM

