


## M4550B / M4551B

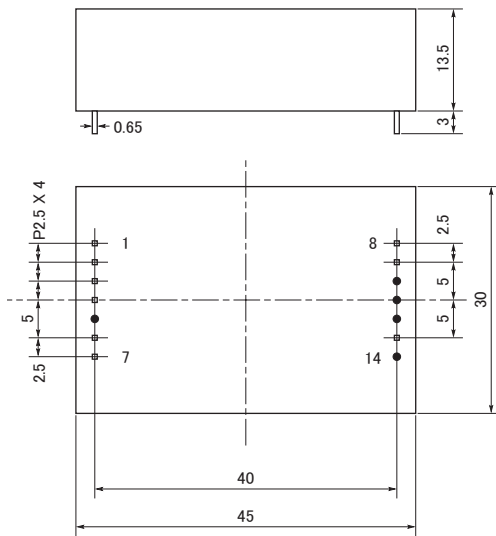


引脚配置

1	INPUT +	8	OUTPUT +
2	INPUT -	9	OUTPUT COM.
3	FBO	10	
4	FBI	11	
5		12	
6	V <sub>o</sub> +15V	13	POWER +15V
7	V <sub>o</sub> -15V	14	

单位: 毫米

## M4650B / M4651B

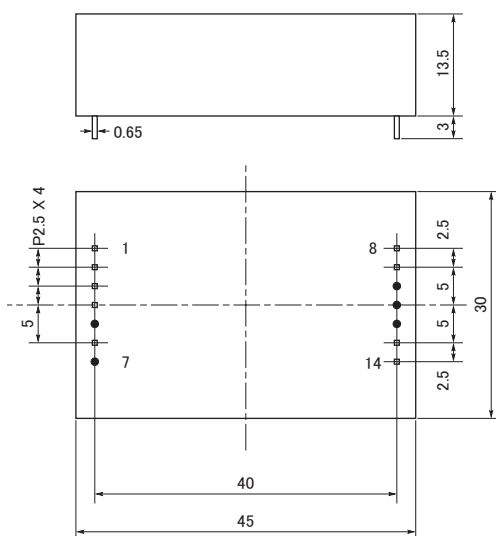


引脚配置

1	INPUT +	8	OUTPUT +
2	INPUT COM	9	OUTPUT -
3	FBO	10	
4	FBI	11	
5		12	
6	POWER +15V	13	V <sub>o</sub> +15V
7		14	V <sub>o</sub> -15V

单位: mm

M4656B / M4657B

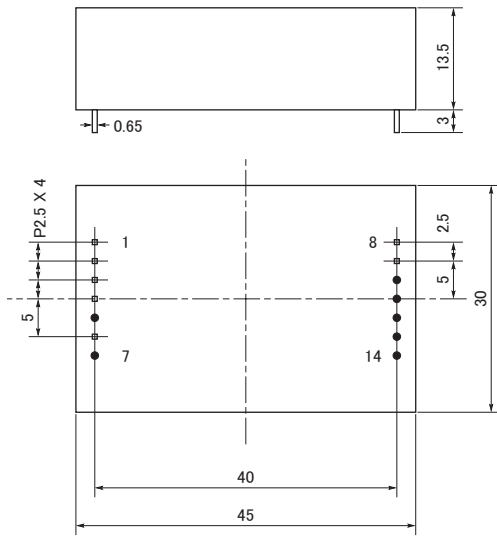


引脚配置

1	INPUT +	8	OUTPUT +
2	INPUT COM	9	OUTPUT -
3	FBO	10	
4	FBI	11	
5		12	
6	POWER +15V	13	
7		14	

单位: 毫米

M4701B / M4702B

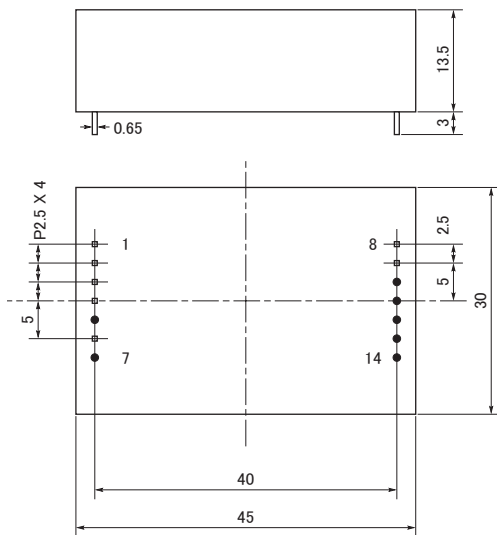

ピン配列

1	INPUT +	8	OUTPUT +
2	INPUT COM	9	OUTPUT -
3		10	
4		11	
5		12	
6	POWER +15V	13	
7		14	

单位: 毫米